

4 AC Motor Controller 220–240 V AC WM-P

| animeo Solo | animeo IB+ | **animeo KNX** | animeo LON |

SOLUTIONS FOR COMMERCIAL BUILDINGS



Ref. 1860219

Motor controller for roller shutters, screens, exterior Venetian blinds and windows.

To individually control four 230 V AC motors.

Available in wall-mounted version and designed for Wieland plug connectors.

Installation advantages

- > The use of plug connectors enables time savings and less wiring errors.
- > Flexible installation options: on DIN rail or with screws.
- > Testing of running direction of the motors can be done with the motor controller itself before the ETS integration programming.

Functional advantages

- > Via local standard switches users can control the solar shading to the desired position and overwrite automatic operation.
- > Each motor output can be controlled individually using KNX or via individual switches.
- > The 8 inputs to connect local push-button switches can also be used to send orders via KNX to create – with ETS – individual groups of motors controlled by local switches.
- > The inputs can also manage switching and dimming via the KNX bus.
- > By plugging the KNX/RTS receiver (ref.1860191) into the motor controller at any time, the RTS range of user interfaces can be used.


Wiring

Connection	Cables	Twisted pair	Max. distance
Motors	Min.: 4 x 0.75 mm ² /19 AWG Max.: 4 x 2.5 mm ² /14 AWG	–	150 m
Switches	Min.: 3 x 0.6 mm ² /22 AWG Max.: 3 x 2.5 mm ² /14 AWG	Recommended	100 m
KNX bus	2 x 0.8 mm ² /20 AWG	Required, following KNX topology guidelines	50 m
220–240 V AC	Min.: 3 x 1.5 mm ² /16 AWG Max.: 3 x 2.5 mm ² /14 AWG	–	

Classification

The Motor Controller is an electronically and manually-operated, independently-mounted control.

- Class A control function
- Type 1 action
- Pollution degree: 2
- Rated impulse voltage: 4 kV
- Temperature of the ball hardness test: 75 ° C
- Type X attachment
- Method of attachment for non-detachable cords: screwless spring terminal
- EMC emission test: $U_{AC} = 230V AC$ $I_{AC} = 0.5 A$
(EN 55022 Class B emission)

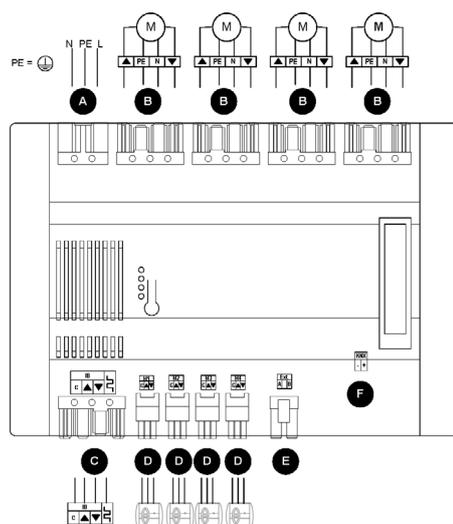

	Connection to	PCB Connector	Cable connector	Remarks
A	230 V AC	92.034.0058.1	92.933.0053.1	
B	Motors Out (4 x)	92.043.0058.1	92.944.0053.1	
C	IB+ Bus in	92.043.0058.0	92.944.0153.0	
D	Local switch (4 x)	93.431.2653.1	93.432.2553.1	
E	Motor Controller Extension	93.082.1558.1	93.941.0558.1	
F	KNX	red/black standard connectors, directly on the KNX bus module		mount under housing flap

CHARACTERISTICS

Supply voltage	220-240 V AC / 50/60 Hz
Stand-by current (IEC 62301)	6 mA @ 230 V AC
Stand-by power (IEC 62301)	> 0.5 W @ 230 V AC
Supply voltage from KNX Bus	KNX-voltage 21 ... 30 V DC, SELV
Rated current consumption KNX	As per KNX guideline; 10 mA
Max. motor current consumption	4 x 3.0 A, $\cos \varphi = 0.95$
Supply voltage of group control input	SELV, 16 V DC =
Supply voltage of local push buttons	SELV, 16 V DC =
Fuse for all outputs	4 x F 3.15 AH
Terminals	Wieland connectors
Terminal KNX	KNX bus terminal (black/red)
Running time per output (relay contact)	Max. 5 minutes
Operating temperature	0 °C to 45 °C
Relative humidity	85%
Material of housing	CC-ABS polycarbonate
Housing dimensions (w x h x d)	180 x 255 x 63 mm
Degree of protection	IP 20
Protection class	II (looped through PE connection - depending on the installation)
Conformity	www.somfy.com/ce