

J4 HTM

Wired

RS485


Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

A universal solution to motorize different kinds of external Venetian blinds.

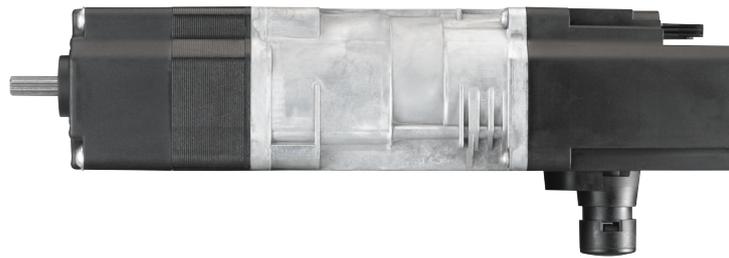

Applications



external venetian blinds

Type 1 and type 2



• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

Main characteristics

- > U or N headrail mounting
- > Safety stop (snow between slats, etc...) via a mushroom
- > Mechanical settings:
 - Up and down end-limits already set for the integration
 - Possibility to readjust easily both limits on site
 - Flexible end-limits and adapted to the main external Venetian blinds of the market
- > Easy integration :
 - Fast connection (plug and play) with Hirschmann plugs


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Mechanic
Conformity	www.somfy.com/ce

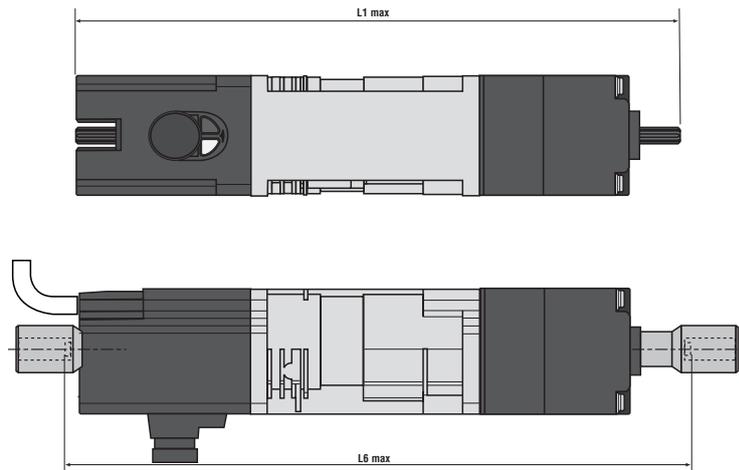


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Neutral	Blue
2	Up	Black
3	Down	Brown
⊕	Earth	Green / Yellow