

J4 WT

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The electronic solution of motorization for external venetian blind in new buildings and renovation projects.



Applications



external
venetian blinds



Type 1 and type 2

• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

Main characteristics

- > U or N headrail mounting
- > 2D mushroom for protection in case of false / inversed installation (the mushroom works as well in up as in down direction)
- > Removable mushroom
- > Parallel wiring
- > Plug and play connection
- > Easy settings on site thanks to the setting tool or thanks to the Telis Modulis RTS (with Modulis slim receiver)
- > Choice of the length for the cable
- > Easy access to buttons even when the motor is installed
- > Fully pre-set motor
- > Safety stop (snow between slats, etc...) via a mushroom


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Electronic
Conformity	www.somfy.com/ce

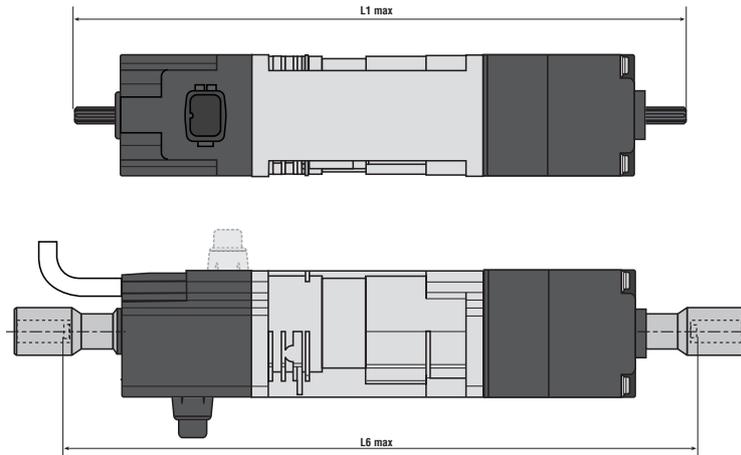


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Neutral	Blue
2	Up	Black
3	Down	Brown
⏚	Earth	Green / Yellow