

Screen Up

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The first 40 mm solution with high torque and high speed for external blinds.



Applications



external
vertical
screens

- Suitable for tubes diameter 40 mm or more
- Can be used for windows up to 9 m²

Main characteristics

- > High speed motor
- > Offer dedicated to commercial applications
- > Enlarge the usage of the diameter 40 mm motor thanks to high speed and high torque


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 44
Operating temperature	20% -25 to 70°C 80% -10 to 40°C
Protection class	Class II
Limit switch unit	Progressive
Conformity	www.somfy.com/ce

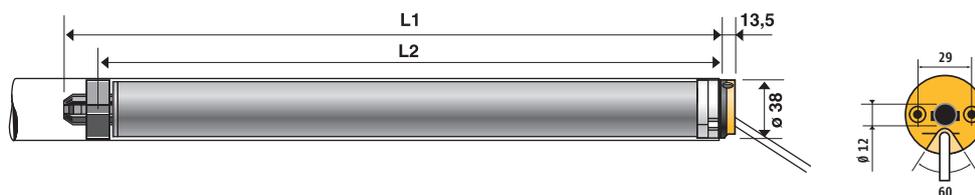

Performance

Nominal voltage	230 V / 50 Hz
Torque	4,5 Nm
Speed	30 rpm

Dimensions

L1 (in mm)	442
L2 (in mm)	421

Type of cable

3 threads by wire

